

Total No. of Questions : 6]

SEAT No. :

P73**OCT. -16/BE/Insem. - 127**

[Total No. of Pages : 2

B.E. (Electrical)**CONTROL SYSTEM - II****(2012 Course) (403145) (SEMESTER - I)***Time : 1Hour]**[Max. Marks :30**Instructions to the candidates:*

- 1) Answer Q1 or Q2, Q3 or Q4, Q5 or Q6.
- 2) Neat diagrams must be drawn wherever necessary.
- 3) Figures to the right side indicate full marks.
- 4) Assume Suitable data if necessary.

Q1) The Open loop transfer function of the system is given as: **[10]**

$$G(s) = \frac{1}{s(s+1)}; H(s) = 1$$

Design a Cascade Lead Compensator so that the Phase Margin (PM) is at least 45° & steady state error for a unit ramp input is ≤ 0.1

OR

Q2) The Open loop transfer function of the system is given as: **[10]**

$$G(s) = \frac{1}{(s+1)(0.5s+1)}; H(s) = 1$$

Design a Cascade Lag Compensator so that the Phase Margin (PM) is at least 50° & steady state error for a unit step input is ≤ 0.1

Q3) a) Define: **[5]**

- i) state,
- ii) state variable
- iii) state vector
- iv) state space
- v) state model

P.T.O.

- b) Obtain the state model of the electric network shown in Figure 1, selecting V_c and i_2 as state variables and current through inductor as the output. [5]

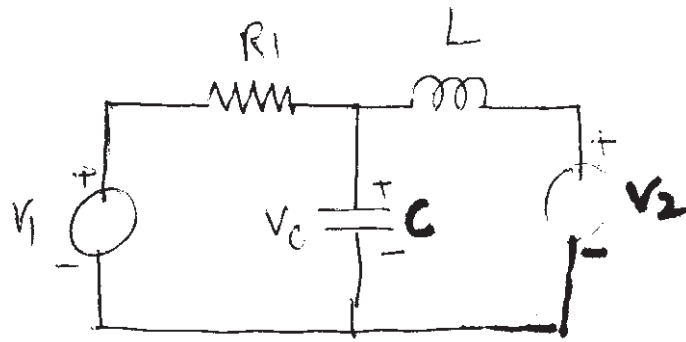


Figure 1

OR

- Q4) a) Derive for the solution of homogeneous state equation $\dot{x} = Ax$. [5]
 b) Compute: [5]
 i) Resolvent matrix $\Phi(s)$
 ii) state transition matrix $\Phi(t)$ using LT method for the system matrix.

$$A = \begin{bmatrix} 0 & -1 \\ -2 & -3 \end{bmatrix}$$

- Q5) Consider the system $\dot{x} = Ax + Bu; y = Cx$ where

$$A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0 & -5 & -6 \end{bmatrix}; B = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}; C = [1 \ 0 \ 0]$$

Determine the state feedback gain matrix K such that the desired closed loop poles are located at $s = -2 \pm j4$ & $s = -10$. Use state feedback $u = -Kx$. [10]

OR

- Q6) Discuss the conditions for complete state controllability & observability as per Kalman & Gilbert. [10]

